

Inland River Buoys

SL-MB-18, SL-MB-24 & SL-MB-42

Sealite have a range of mooring chains & accessories - ask your representative today how we can supply your complete mooring solution



Sealite's barrier floats can be linked together to restrict boating traffic and swimmers from entering specific danger areas such as spillways and dams. They are manufactured using strong, UV-stabilised polyethylene and are available in a range of high visibility colours.

Sealite's barrier floats are available in 18" (457mm) and 24" (610mm) diameter. The barrier floats are rotationally moulded as a single piece with a wall thickness up to 5mm – increasing strength and ensuring a robust and functional product. The floats are polyurethane foam filled making them virtually unsinkable.

The barrier floats come ready for deployment and Sealite also has a range of accessories available including cable and mooring equipment.

To service the 'urgent need' requirements of our customers, Sealite keeps stock available ready for immediate shipment.



The Sealite Advantage


- Strong polyethylene construction
- Rotationally moulded
- High visibility orange, red, green, white, yellow
- Easy to install
- Optional accessories including cable & mooring equipment
- ID labels & graphics available
- Typical applications: dam barriers, security zones, swim lines
- SL-BF-1830: 18" diameter
- SL-BF-2436: 24" diameter



Environmentally Friendly & Recyclable

Sealite buoy products are made from recyclable materials. As a service to customers, individual components and products at the end of their service life may be returned to Sealite for recycling.

Technical Illustrations

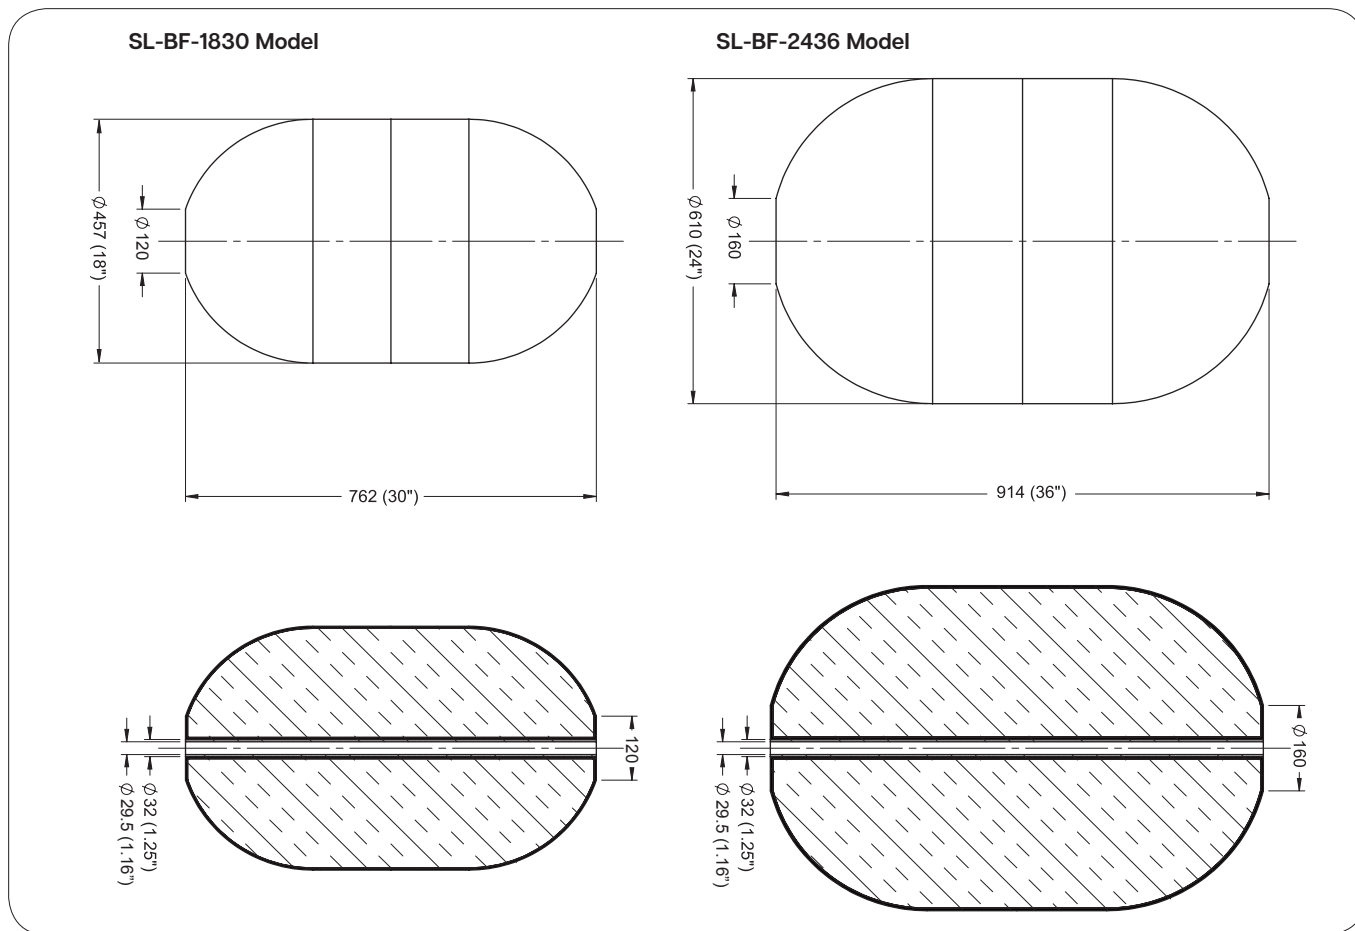

Technical Specifications*

| | SL-BF-1830 | SL-BF-2436 |
|--|--|--|
| General Characteristics | | |
| Available Colours | Orange, Red, Green, White, Yellow | Orange, Red, Green, White, Yellow |
| Total Float Volume (ltrs/US gallon) | 100 / 26.4 | 214.1 / 56.6 |
| Total Reserve Buoyancy (kg/lbs) | 78.8 / 174 | 167.9 / 370 |
| Physical Characteristics | | |
| Material | Rotationally-moulded UV-stabilised virgin polyethylene | Rotationally-moulded UV-stabilised virgin polyethylene |
| Wall Thickness (mm/inches) | 4 / 0.16 | 5 / 0.2 |
| Filling | Closed-cell polyurethane foam | Closed-cell polyurethane foam |
| Length (mm/inches) | 762 / 30 | 914 / 36 |
| Diameter (mm/inches) | 457 / 18 | 610 / 24 |
| Mass (kg/lbs) | 9.5 / 21 | 17.7 / 39 |
| Warranty * | 1 year | 1 year |



Comes standard with eye nuts and threaded rod

We believe technology improves navigation™



Sealite Pty Ltd
Australia
☎ +61 (0)3 5977 6128

Sealite Asia Pte Ltd
Singapore
☎ +65 6829 2243

Sealite United Kingdom Ltd
UK
☎ +44 (0) 1502 588026

Sealite USA LLC
USA
☎ +1 (603) 737 1311



* Specifications subject to change or variation without notice
 * Subject to standard terms and conditions
 * Intensity setting subject to solar availability
 * Refer to the Sealite website under the warranty section

